



SAFENET TOKEN USER INSTALLATION GUIDE

Website URL: <https://www.vsign.in/>

VERSION 1.0, RELEASED ON 27.09.2025

Verasys Limited

Registration No-CIN-U72900MH2016PTC285121 | Office Address: 2nd Floor, Bhavna Building, V.S. Marg,
Prabhadevi, Mumbai – Pin: 400 025, India | Tel: 022-4315-6000 | Website: www.vsign.in |

This document is the property of **Verasys Limited**. and is authorized by the undersigned for circulation within the Organization for effective implementation towards continual improvement of the process, product and system protect Information security. This document shall not be reproduced either in part or whole without prior permission from the undersigned.

How to Install the SafeNet Drivers and Client Software

❖ Installing the SafeNet Authentication client:

1. Run the **SafeNet Authentication Client** installer.
2. On the **Welcome to the SafeNet Authentication Client Installation Wizard** page, click **Next** to begin the software installation process.




3. On the **Interface Language** page, in the drop-down list, pick a language for the interface and then click **Next**.



4. On the **License Agreement** page, read through the license agreement, select **I accept the license agreement** and then click **Next**.




5. On the **Destination Folder** page, choose where you want to install the SafeNet Authentication Client and then click **Next**.

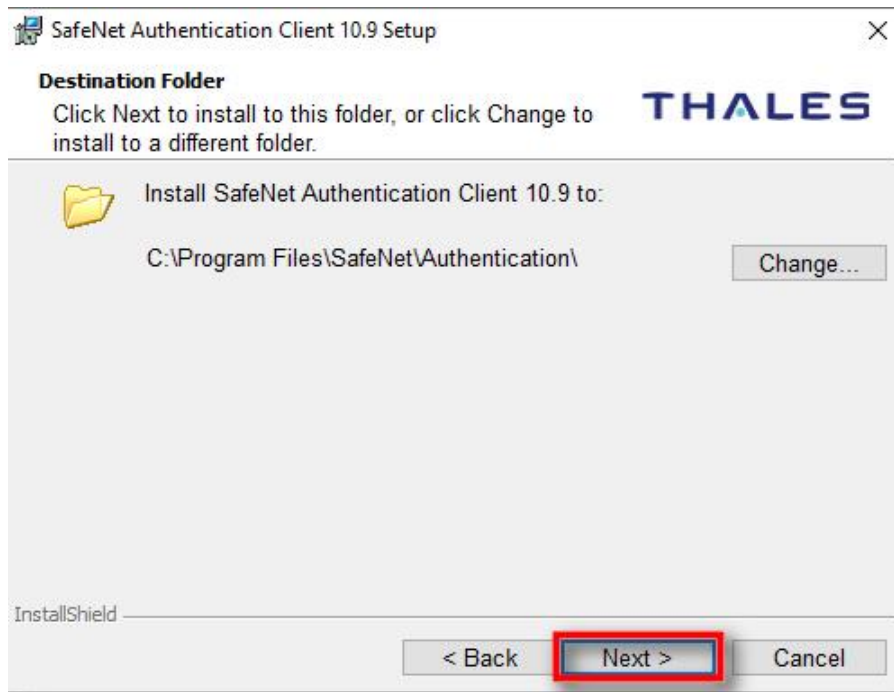


6. On the **Setup Type** page, select **Typical** for the installation type and then click **Next**.



7. On **The wizard is ready to begin installation** page, click **Install**.

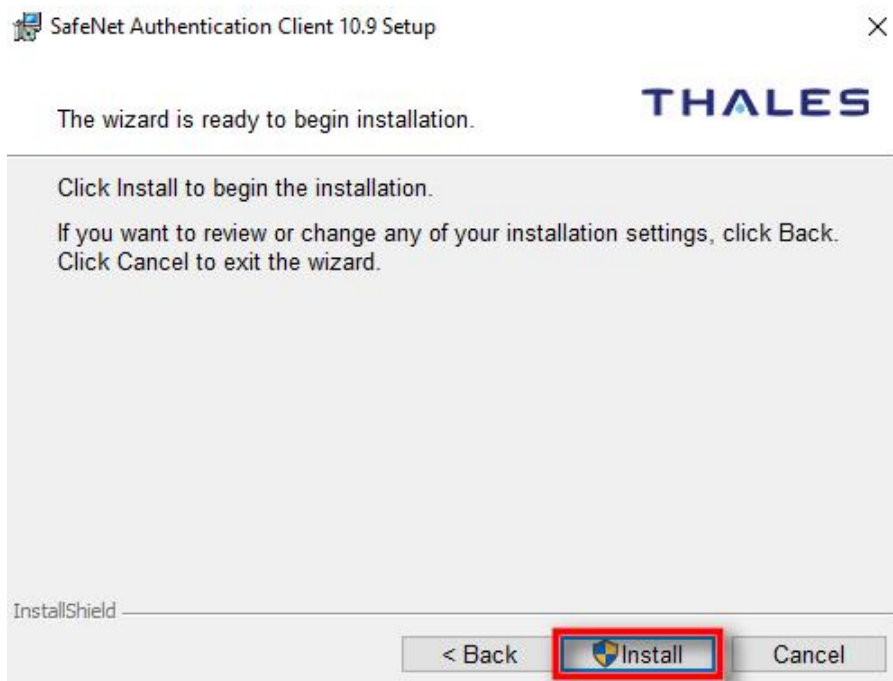

8. It may take a few minutes to install the software.

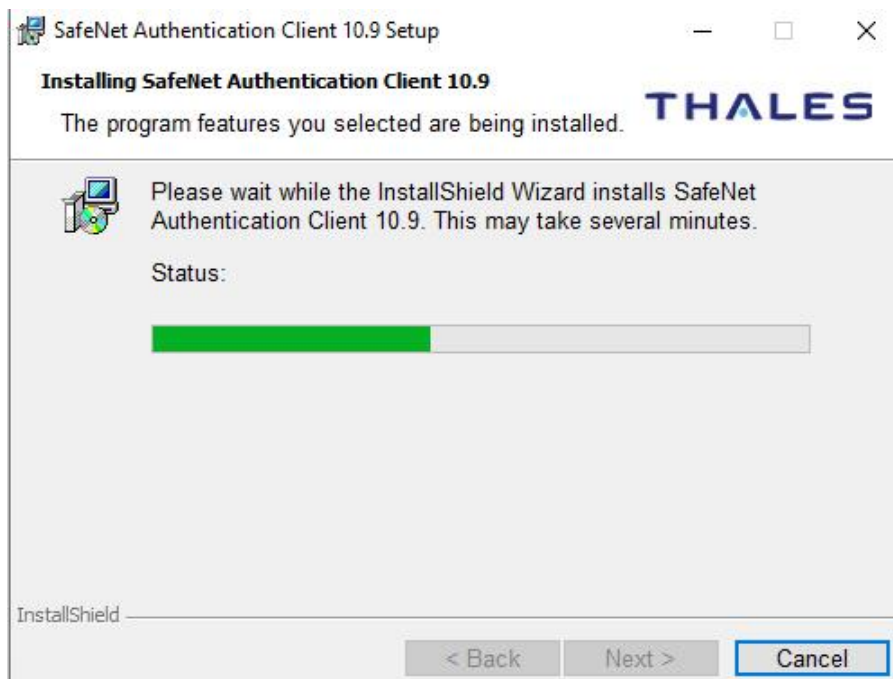

9. On the **SafeNet Authentication Client has been successfully installed** page, click **Finish** to exit **SafeNet Authentication Client Setup**.




10. You have successfully installed the SafeNet Client Software/ Driver.


How to Initialize or Set a SafeNet 5110FIPS USB Token Device Password

❖ Initialize your SafeNet USB hardware token:


1. **Insert** your SafeNet USB hardware token into your computer.
2. Locate the **SafeNet Authentication Client** icon on the Taskbar; right-click on the icon and select **Tools**.

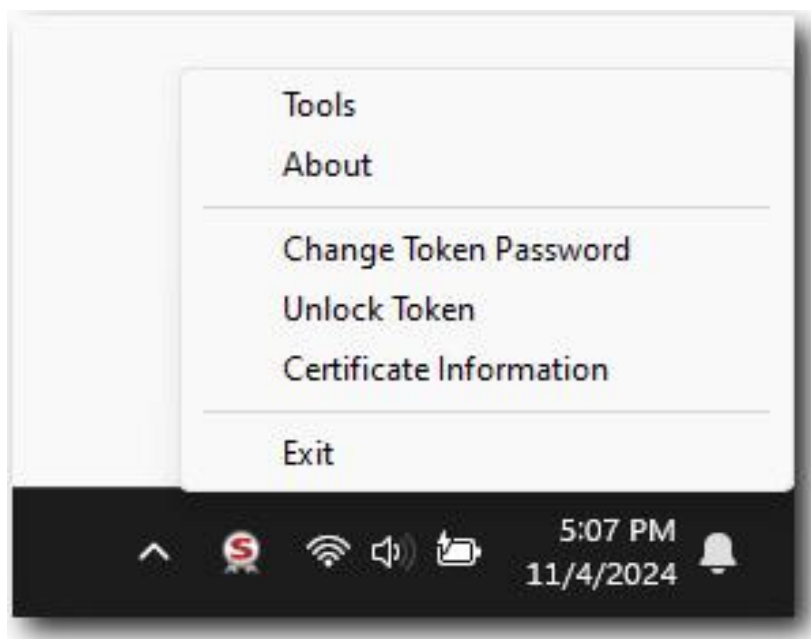


3. Select the **Gear** icon for the advanced view.

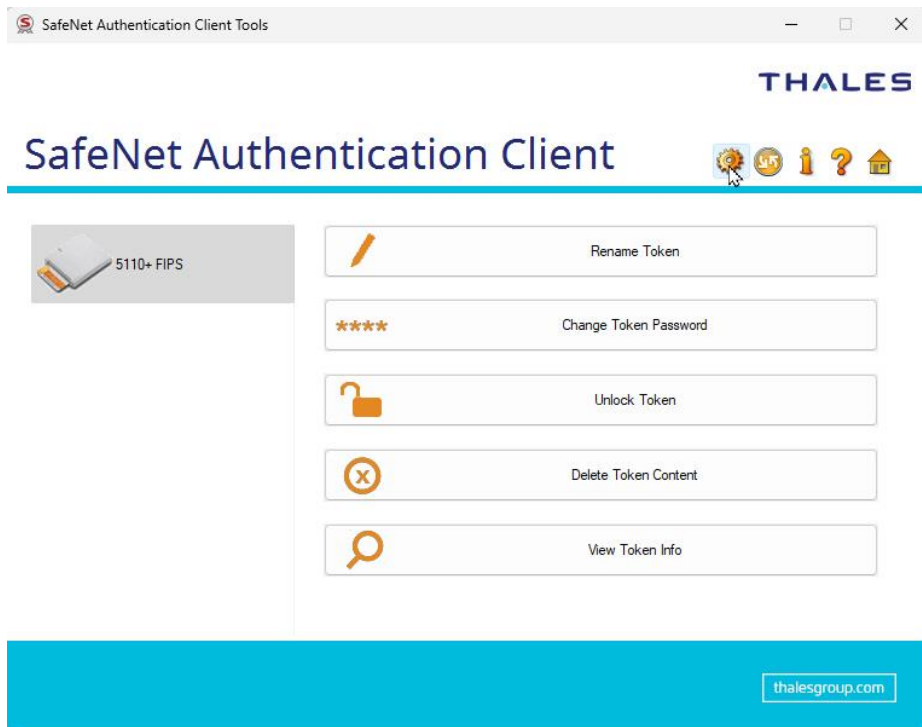


4. On the left-hand side, under **Tokens**, right-click on your token name and select **Initialize Token**.

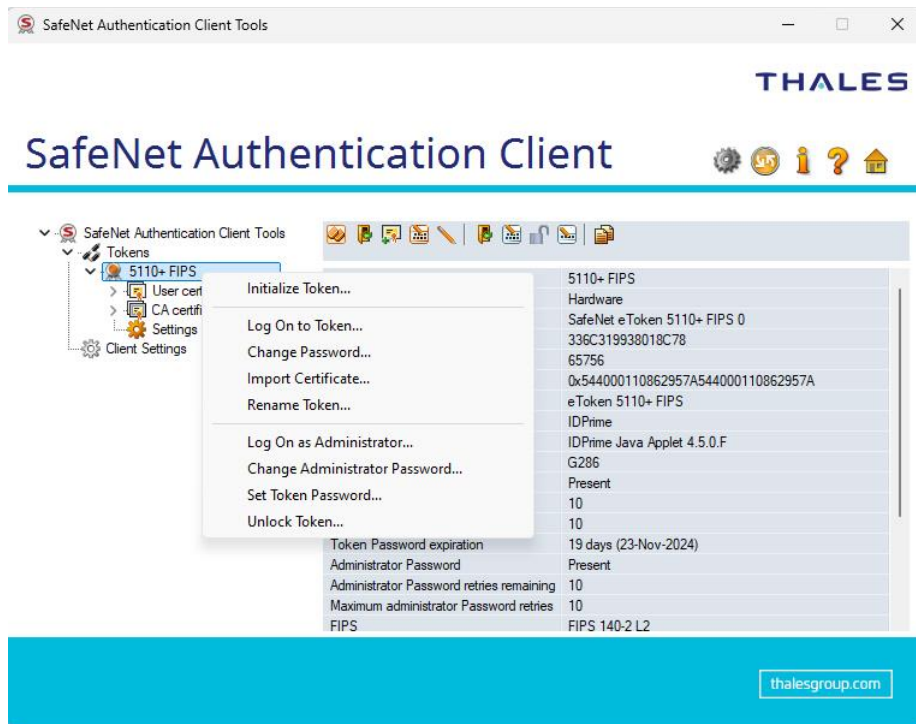

5. When the **Initialize Token** window opens, click **Next**.

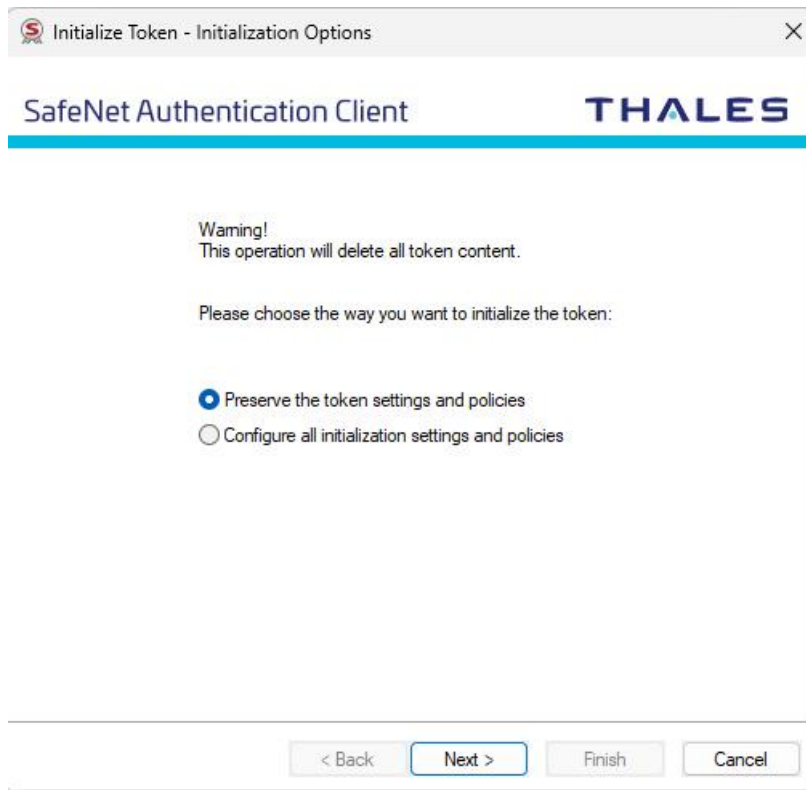


6. Click **Next**

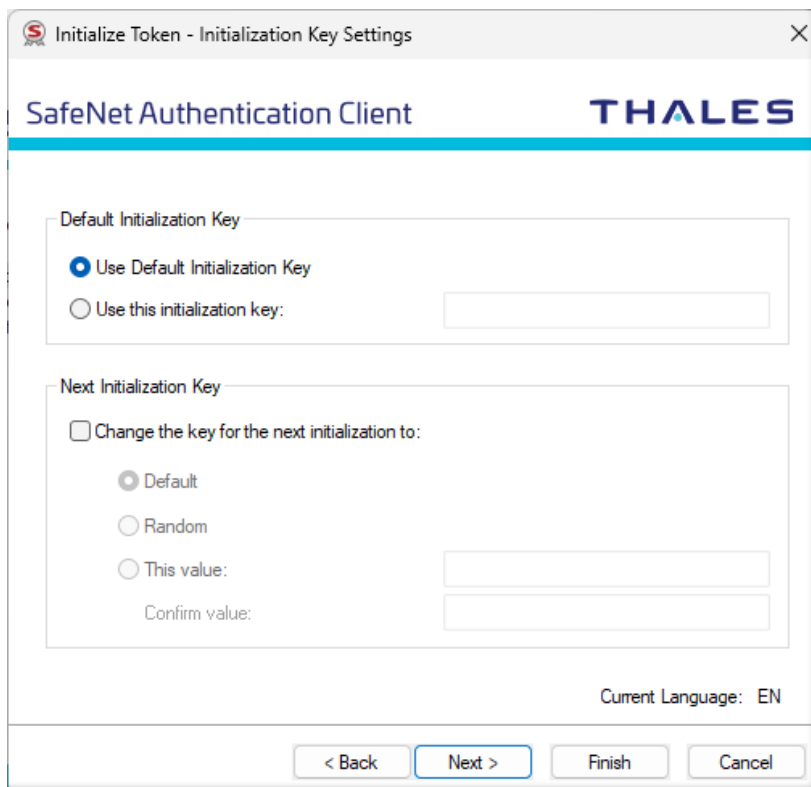


7. In the section Create Token Password, enter your new **Token Password**.

If you do not want the token password to be changed when next the token is used, uncheck the **Token password must be changed on first logon** box.

Click **Finish** to continue.

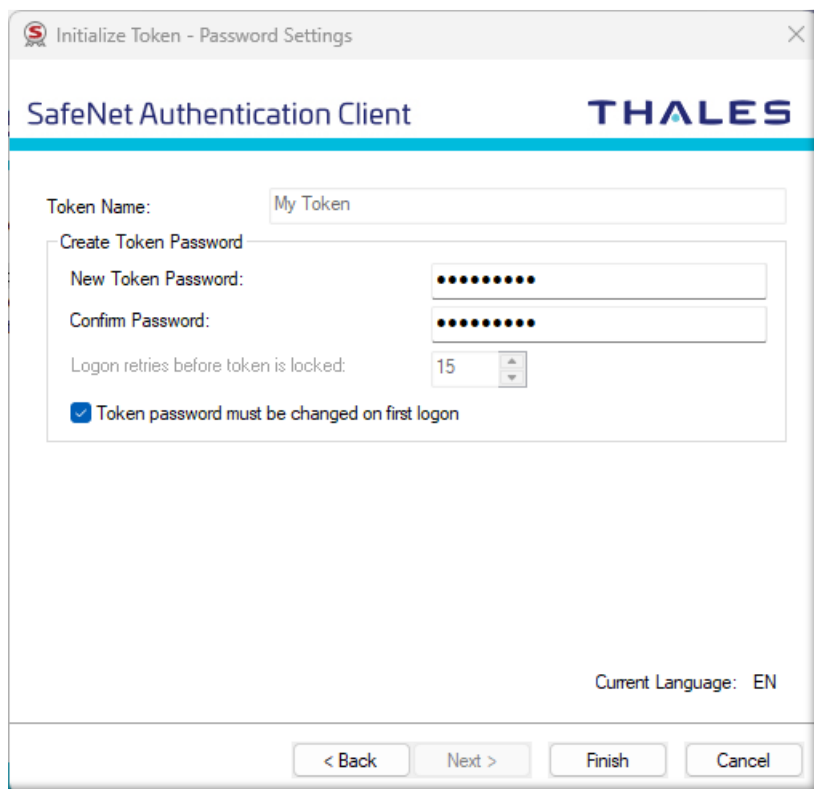


8. Click **OK** to begin the initialization process.

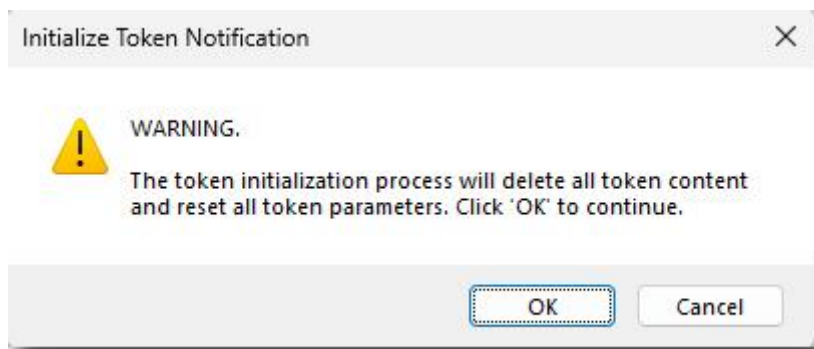

9. The SafeNet Authentication Client will begin initializing your token. Your token must remain plugged in until the process is complete.



10. Once the SafeNet USB token has been initialized, you will be **able to install new certificates onto the token using** your new token password.

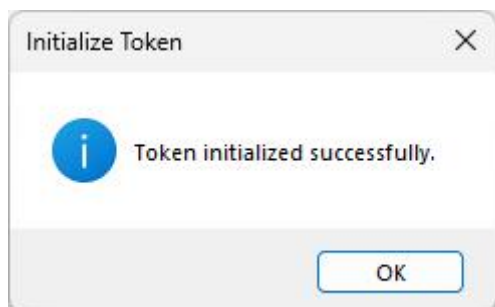

- - - - - End Of Document - - - - -